


| NPT (Female) x Transmitter Flange | | | | |
|-----------------------------------|--------------------------|---------------------------|--|-----------------------------|
| Sr. No. | Inlet Transmitter Flange | Outlet Transmitter Flange | Drain with Plug Thread type NPT Female | Model No. For MOC: SS316 |
| 1 | TF | TF | NA | SS-3VMH-TF-TF |
| 2 | TF | TF | 1/4" | SS-3VMH-TF-TF-4F |

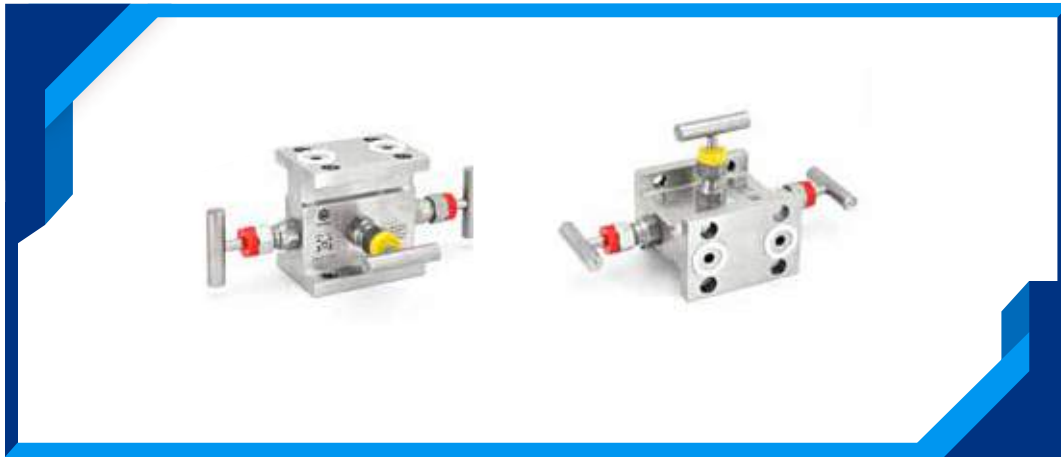

| Material Grade Selection Chart | |
|------------------------------------|---|
| For following Material Grade (MOC) | Replace First Two Letters of Model No. with following |
| SS316L | SSL |
| SS304 | S4 |
| SS304L | S4L |
| Brass | B |
| Alloy 400 | ML |
| Alloy 600 | INC |
| Alloy C276 | HC |
| Carbon Steel | CS |

Accessories: 4 Nos. 5/16" UNF Bolts & 2 No. PTFE Seal Ring